


PVC WATERSTOP


- PVC water stop tapes are used in walls, reinforced concrete walls, and foundations
- They are used in cold joints.
- They have high flexural strength and elasticity.
- They are resistant to high water pressure.
- Joint locations are joined by the thermal fusion method.

AREAS OF USAGE

- Hydraulic Structures
- Underground Structures
- Tunnels, Bridges, and Viaducts
- Retaining Walls and Waterways
- Basement Concrete Walls and Foundations
- Water Treatment Facilities
- Swimming Pools and Ornamental Ponds
- Water Tanks

Product Information	Width(a)	Weight (kg/m)	Thicknes s(t)	Anchor High (f)	Product Lenght	Elongation Gap (k)	Colour
D 240	240 mm	2,10 kg/m	4 mm	15	20	20 m	Yellow
D 320	320 mm	3,10 kg/m	5 mm	15	20	20 m	Yellow
D 500	500 mm	5,50 kg/m	6 mm	18	20	20 m	Yellow

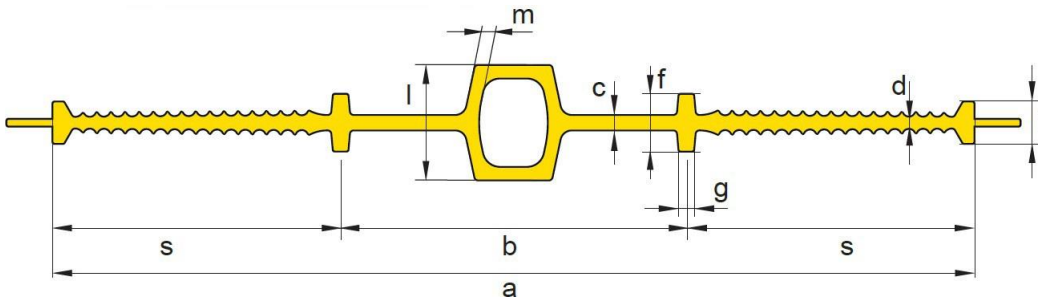

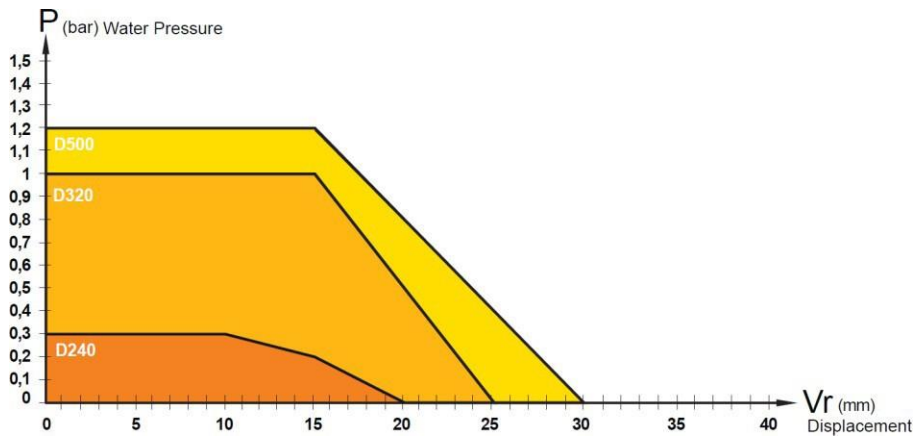

PHYSICAL PARAMETERS

Analysis	Standart Test Method	Unit	Result
Hardness	TS 3078-2	SHORE A	75
Tensile Strenght	TS 3078-2	MPa	10
Elongation of Break	TS 3078-2	%	326
Tension	TS 3078-2	kN/m	14

In economic formulas, dimensions may have a tolerance of $\pm 10\%$.